

# MI33PRA/MI33PST

TECHNICAL DATA

## Passive Instrument Cables



MI33PRA




MI33PST

- For use with all TA5 wired transmitters, including IM, LM, LMa, UM400, UM400a, SM Series, DB, DBa, LMa and LT models
- Passive design for use with “instrument” input on LT transmitter, or with very high output instrument pickups such as electric bass guitars with 18 volt systems
- Designed for musicians who demand rugged, high quality equipment and the best sound quality available
- 30 inch overall length

### Transmitter Setup Instructions

Play at the same level expected during the performance and adjust the input gain until the -20 LED flickers red (indicating +0 dB) during the loudest passages.

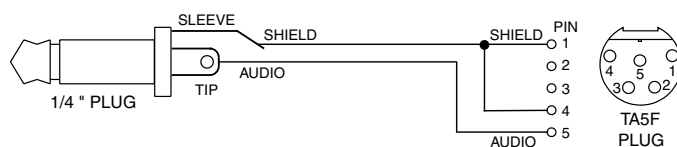

Wiring diagram

Adjust transmitter gain for occasional red flashes at -20

SM Series	LM, LMa, IM	LMa, LT
-10	-10  -20	-10
-20		-20
PWR		

Other cables available:

### MI39ARA and MI39AST

Active cables for use with passive pickups or low-output instruments only, with IM, LM, LMa, UM400, UM400a, SM Series, and LMa transmitters.

